


# MODEL WWM-20 SPIRAL WINDING MACHINE

## WWM-20 螺旋型绕线机

The WWM-20 is designed for the winding of all kinds of base material. Processable are round and flat materials up to a diameter of 10mm .All parameters are freely programmable and recallable. Dereelers, wind-up installations as well as resistance value regulators are optional. Because of the modular construction of the machine custom specification are easy to integrate, such as for example taping installation, cutting device, heating system etc.

WWM-20 是为了各种螺旋型绕线而设计的。适合各种圆型和扁平材料，最大线径为 11mm 全部参数都是可设定的，可储存。收料放料的安装是可选的。客户所要求的机器标准结构是容易结合其他附加部件的，如包带装置，剪裁装置，加热系统等。

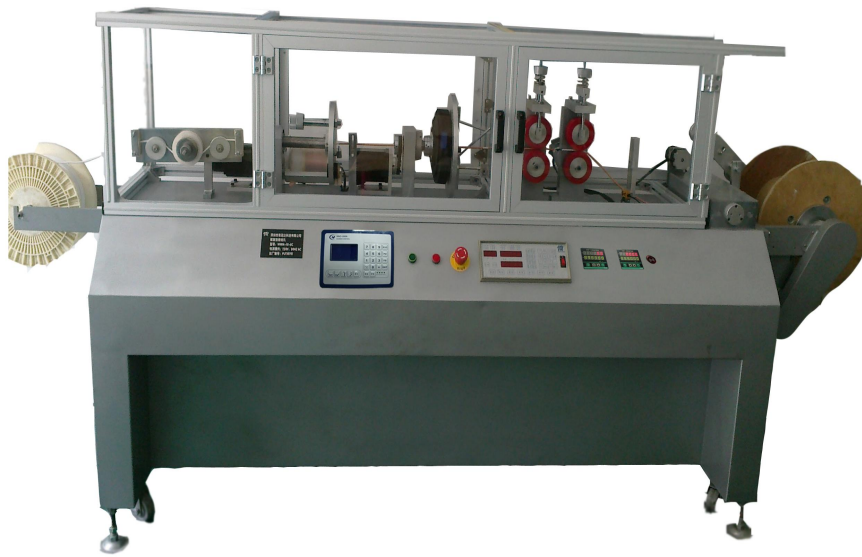

### TECHNICAL DATA/技术数据:

- Winding material 0.03-0.4mm (depending of material)  
外绕丝线径范围: 0.03 -0.4mm
- Wire supply spools: DIN 90  
线轴: DIN 90
- Diameter of base material Max:11mm  
内绕丝线径范围: 最大到 11mm
- Winding speed Max: 1000rpm  
绕线速度: 每分钟最高 1000 转
- Pitch steplessly programmable for  
间距: 可设定
- Display turns and length  
显示圈数及米数
- Winding motor: 1HP servo motor  
绕线为伺服马达
- Taping motor: 6A Stepper motor  
包带为步进马达
- Travel motor: 3.2A Stepper motor  
传动轮驱动马达为步进
- Take up unit: DC motor 350W  
收料直流无刷马达
- Machine size 2620×1300×640 mm (L×W×H)  
机械尺寸
- Power: 220 V、50-60 Hz  
交流电源
- Weight: 380 kg  
重量